

For Steam, Air and Non-Corrosive Gases

The GD-30 is a compact, high performance direct acting valve. Economical to buy and use, it's ideal for those low to moderate flow applications where accuracy of +/-10% is acceptable. The GD-30 is well suited for laundry and dry cleaning equipment, hospital equipment, tire molds, humidifiers, small heaters and applications in food processing. It provides tight shutoff for dead-end service on steam. Turndown ratio is 10:1 and ANSI Class IV Shutoff.

For a fully detailed certified drawing, refer to:

GD-30 (bronze only) CDY #1038
GD-30S (stainless steel) CDY #1089

GD-30/30S Specifications

Model Number	Inlet Pressure psig (bar)	Reduced Pressure psig (bar)	Spring Color	Minimum Differential psig (bar)	Application	Maximum Temp. °F (°C)	Materials		
							Body	Valve/Seat	Bellows
GD-30	15 - 250 (1 - 17)	3 - 15 (.21 - 1.0) 7 - 80 (.48 - 5.5)	Yellow Blue Green	7 (.48)	Steam, Air, Non-Corrosive Gases	410 (210)	Cast Bronze ASTM B584	Stainless Steel AISI 440/304	Phosphor Bronze ASTM B103*
GD-30S	15 - 300 (1 - 20)	50 - 140 (3.4 - 9.6)			Steam	430 (220)	Stainless Steel AISI 316		Stainless Steel AISI 316L


*Stainless steel optional

GD-30/30S Dimensions and Weights

Symbol	Connection Size											
	in		mm		in		mm		in		mm	
	1/2	15	3/4	20	1	25	1-1/2*	40	2*	50		
L	3-1/8	80	3-3/8	85	3-3/4	95	5-1/2	140	5-7/8	150		
H ₁	2	47	2	47	2	47	3	77	3	77		
H	7-1/2	191	7-1/2	191	7-1/2	191	12-1/8	307	2-1/8	307		
Weight lb (kg)	4-1/4 (1.9)		4-1/4 (1.9)		4-1/2 (2.0)		21-3/8 (9.7)		22 (10)			
C _v	1.3		1.5		2.5		5.6		8.5			

NOTE: GD-30 capacities cannot be determined with a formula—consult capacity tables. Reference note under formula key on page 269.

*GD-30S available in 1/2", 3/4", and 1" only.

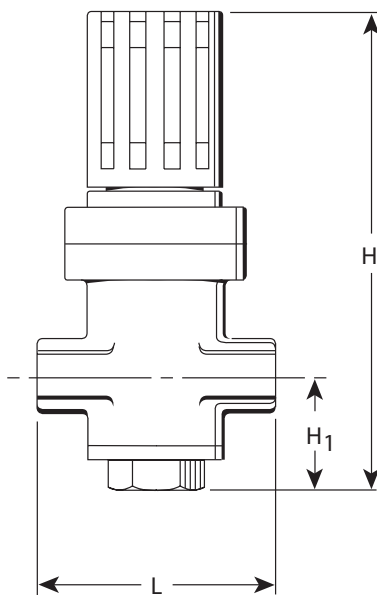

GD-30 Capacities—Steam							GD-30S Only						
lb/hr							kg/hr						
Inlet	Outlet	Connection Size					Inlet	Outlet	Connection Size				
		in							mm				
psig		1/2	3/4	1	1-1/2	2	bar		15	20	25	40	50
C _v Factor		1.3	1.5	2.5	5.6	8.5	C _v Factor		1.3	1.5	2.5	5.6	8.5
15	7	49	56	92	198	297	1.0	.5	22	25	42	90	135
20	13	53	61	105	216	331	1.4	.9	24	28	48	98	150
	7	42	55	63	180	264		.5	19	25	35	82	120
30	23	62	71	112	242	408	2.0	1.6	28	32	51	110	185
	15	53	60	101	209	309		1.0	24	27	46	95	140
40	3	33	40	60	139	216	2.8	.2	15	18	27	63	98
	32	99	121	187	407	617		2.2	45	55	85	185	280
50	20	79	97	159	330	517	3.4	1.4	36	44	72	150	235
	4	40	55	77	159	264		.3	18	25	35	72	120
60	40	130	143	242	539	837	4.0	2.8	59	65	110	245	380
	20	99	115	187	407	628		1.4	45	52	85	185	285
80	5	48	62	88	193	297	5.5	.3	22	28	40	88	135
	48	137	154	265	584	899		3.3	62	70	120	265	408
100	40	150	165	289	617	969	6.9	2.8	68	75	131	280	440
	18	90	104	170	374	584		1.2	41	47	77	170	265
120	6	55	73	99	220	331	8.3	.4	25	33	45	100	150
	64	176	205	342	738	1,168		4.4	80	93	155	335	530
150	54	187	225	353	782	1,201	10.3	3.7	85	102	160	355	545
	23	121	137	220	489	749		1.6	55	62	100	222	340
180	8	60	77	108	231	363	12.4	.5	27	35	49	105	165
	80	203	242	397	863	1,355		5.5	92	110	180	392	615
200	66	225	262	437	958	1,465	13.8	4.5	102	119	198	435	665
	40	198	231	375	837	1,278		2.8	90	105	170	380	580
225	10	68	79	132	297	473	15.5	.7	31	36	60	135	215
	96	231	276	452	991	1,520		6.6	105	125	205	450	690
250	70	276	311	518	1,168	1,818	17.2	4.8	125	141	235	530	825
	45	240	267	450	980	1,509		3.1	109	121	204	445	685
275	12	110	121	198	462	705	18.9	.8	50	55	90	210	320
	120	287	333	551	1,212	1,862		8.3	130	151	250	550	845
300	85	364	421	705	1,531	2,369	20.0	5.9	165	191	320	695	1,075
	55	298	353	595	1,278	2,005		3.8	135	160	270	580	910
300	15	132	165	254	562	848	20.0	1.0	60	75	115	255	385
	140	408	485	794	1,719	2,677		9.7	185	220	360	780	1,215
300	115	430	507	860	1,829	2,832	20.0	8.0	195	230	390	830	1,285
	70	386	430	739	1,619	2,501		4.8	175	195	335	735	1,135
300	18	165	187	309	683	1,035	20.0	1.2	75	85	140	310	470
	140	461	518	871	1,983	3,063		9.7	209	235	395	900	1,390
300	115	474	540	904	2,005	3,085	20.0	8.0	215	245	410	910	1,400
	80	430	496	827	1,818	2,810		5.5	195	225	375	825	1,275
300	20	209	242	386	848	1,300	20.0	1.4	95	110	175	385	590
	140	485	573	948	2,060	3,195		9.7	220	260	430	935	1,450
300	115	496	584	961	2,071	3,207	20.0	8.0	225	265	436	940	1,455
	85	463	540	904	1,983	3,063		5.9	210	245	410	900	1,390
300	23	254	298	496	1,079	1,675	20.0	1.6	115	135	225	490	760
	140	525	606	1,014	2,226	3,438		9.7	238	275	460	1,010	1,560
300	120	551	584	1,038	2,248	3,471	20.0	8.3	250	265	471	1,020	1,575
	70	463	529	893	1,939	2,997		4.8	210	240	405	880	1,360
300	25	276	320	529	1,146	1,796	20.0	1.7	125	145	240	520	815
	140	529	613	1,023	—	—		9.7	240	278	464	—	—
300	120	529	613	1,023	—	—	20.0	8.3	240	278	464	—	—
	70	470	542	902	—	—		4.8	213	246	409	—	—
300	28	295	344	562	—	—	20.0	1.9	134	156	255	—	—
	140	529	613	1,023	—	—		9.7	240	278	464	—	—
300	100	529	613	1,023	—	—	20.0	6.9	240	278	464	—	—
	70	478	551	926	—	—		4.8	217	250	420	—	—
300	30	309	359	595	—	—	20.0	2.7	140	163	270	—	—

NOTE: For air capacities scfm, multiply steam capacities (lb/hr) by 0.36. For air capacities m3/hr, multiply steam capacities (kg/hr) by 1.35. Maximum pressure reduction ratio 10:1.

Designs, materials, weights and performance ratings are approximate and subject to change without notice. Visit www.armstronginternational.com for up-to-date information.